


NANO C

1.158

 **Allowed user weight**
100 kg






Monocoque frame



Shapely frame concept

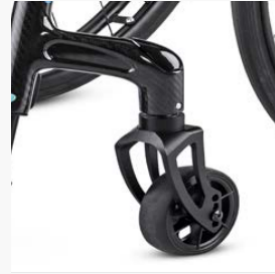

Steering wheel connection



Standard with folding back

Pure Design in Carbon

EFFICIENCY

- Permanent provision with adjustment possibilities to functional changes reduces follow-up costs
- Extensive serial equipment minimises necessity for expensive customised parts
- Low wear due to high quality attachments

THERAPEUTIC BENEFIT

- Perfect easy running and little own weight support the independence of the user
- Adaptable to functional changes and individual needs of the user through adjustment of the back, seat and chassis
- Extensive equipment assortment for long-term users

FIELD OF USE

- For permanent and long term provision
- For paraplegic provision
- Very good suitability for many disease patterns, even for severely encumbered
- Users without function of the lower extremities (lateral transfer, driven through the handrims)
- Easy to load

ORDER

COST ESTIMATE

CUSTOM DESIGN

Please fax the completed order form to: 05733 922 9311

Customer service 05733 922 311

Billing address / Customer ref. no.:

Delivery address:

Tax-ID

Consignment / Comments:

Order quantity:

MEYRA



Allowed user weight

100 kg



Hints

Our Terms and Conditions as stated at www.meyra.de/AGB shall apply
You can find information on the measurement process at www.meyra.de/messverfahren

Valid from 01.01.2024 – 31.12.2024.
Errors, misprints and changes reserved.

Use our K.I.S.S.S. for orders and configurations at www.kisss-by-meyra.de
You avoid queries and incorrect orders thanks to the buildability check

When using auxiliary drives, the permissible total weight must not be exceeded.

**Technical specifications**

Seat widths in mm	380 / 400 / 420 / 440
Width in mm	540 / 560 / 580 / 600
Seat depth in mm	380 / 400 / 420 / 440 / 460
Seat height front/rear in mm	450 to 530/360 to 510
Overall height in mm	Rear seat height + back support height
Back support height in mm	variable from 250 to 400 +/- 15
Length with footrest in mm	800 - 982 (depending on frame length, wheel size and axle position)
User weight	100 kg
Empty weight from	7,5 kg
Permissible overall weight	110 kg
Transport weight	5 kg
Rear wheel	600 (24") / 635 (25") / 660 (26")
Brake test according to STANDARD	7°

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

01 Seat width / Seat depth

	Seat depth (SD)				
	(C-368)	(C-615)	(C-784)	(C-618)	(C-619)
Seat width/Seat depth	SD 380 mm	SD 400 mm	SD 420 mm	SD 440 mm	SD 460 mm
SW 380 mm (C38)					
SW 400 mm (C40)					
SW 420 mm (C342)					
SW 440 mm (C344)					

 including utensil pocket under the seat belt

02 Frame forms

CODE	DESCRIPTION	ANGLE
346	Standard front frame	80°

Frame options

CODE	DESCRIPTION
4950	Taper frame (20 mm each side)
903	Reinforced caster forks



Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

03 Front seat height (FSH) in combination with castor wheel (without seat cushion)

Please select your desired seat height by selecting a possible combination of seat height and wheel size. The max permissible seat height difference between front and rear seat height is 100 mm!

Recommendation: Solid rubber steering wheels for heavier user weights

Code/Art.	Castor	Front seat height in mm (FSH)								
		450	460	470	480	490	500	510	520	530
151/908	Ø 100 Solid rubber black									
151/909	Ø 100 Solid rubber grey									
325/908	Ø 125 Solid rubber black									
325/909	Ø 125 Solid rubber grey									
327/908	Ø 142 Soft-solid rubber black									
327/909	Ø 142 Soft-solid rubber grey									

Front seat height (FSH) in combination with aluminum castor wheel (without seat cushion)

Code/Art.	Castor	Front seat height in mm (FSH)								
		450	460	470	480	490	500	510	520	530
2480	Ø 100 x 23 Lightwheel black									
2481	Ø 100 x 32 Castor aluminum silver									
2482	Ø 125 x 32 Castor aluminum silver									

 Tires: CODE 2480 solid rubber, transparent/colored - CODE 2481/2482 solid rubber black

Seat height front in combination with carbon castor (without seat cushion)

Code	Castor	Front seat height in mm (FSH)								
		450	4560	470	480	490	500	510	520	530
2495	Ø 100 x 30 mm, Black									
2496	Ø 125 x 30 mm, Black									

 Tyres: solid rubber, black

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

Seat height front in combination with aluminium castor (without seat cushion)

Code	Castor	Front seat height in mm (FSH)								
		450	460	470	480	490	500	510	520	530
2483	Ø 100 x 37 mm, Silver									
2484	Ø 100 x 37 mm, Black									
2485	Ø 100 x 37 mm, White									
2486	Ø 100 x 37 mm, Red									
2487	Ø 100 x 37 mm, Blue									
2488	Ø 100 x 37 mm, Orange									
2489	Ø 125 x 37 mm, Silver									
2490	Ø 125 x 37 mm, Black									
2491	Ø 125 x 37 mm, White									
2492	Ø 125 x 37 mm, Red									
2493	Ø 125 x 37 mm, Blue									
2494	Ø 125 x 37 mm, Orange									

 Tyres: solid rubber, black

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

04 Rear wheels i.c. with seat height (tires CAT 07 and hand rims CAT 06)

RSH (mm) 360 370 380 390 400 410 420 430 440 450 460 470 480 490 500 510

- A
- B
- C

CODE	RSH	DESCRIPTION	Ø
651	<input checked="" type="radio"/> A	Standard wheel, incl. quick release axle (pair)	24"
2651	<input checked="" type="radio"/> A	Standard wheel black, incl. quick release axle (pair)	24"
848	<input checked="" type="radio"/> A	SILVERDESIGN with radial spokes and high flange rim incl. quick-release axle (pair)	24"
695	<input checked="" type="radio"/> A	Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black <i>⚠ Recommended from 100 kg user weight or for dynamic driving not i.c. with. Carbolife push rims CODE 849, 850, 853</i>	24"
695	<input checked="" type="radio"/> B	Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black <i>⚠ Recommended from 100 kg user weight or for dynamic driving not i.c. with. Carbolife push rims CODE 849, 850, 853</i>	25"
695	<input checked="" type="radio"/> C	Active-wheel with radial spokes, high flange rim, hollow rim (Jumbo rim) in black <i>⚠ Recommended from 100 kg user weight or for dynamic driving not i.c. with. Carbolife push rims CODE 849, 850, 853</i>	26"
2469	<input checked="" type="radio"/> A	Spinergy CLX, carbon rear wheel, spokes and hub black	24"
2470	<input checked="" type="radio"/> A	Spinergy LX, aluminum rear wheel, spokes, rim and hub black	24"
2471	<input checked="" type="radio"/> A	Spinergy LX, aluminum rear wheel, rim and hub black, spokes white	24"
2472	<input checked="" type="radio"/> A	Spinergy LX, aluminum rear wheel, rim and hub black, spokes orange	24"

⚠ Seat height data without seat cushion

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

Rear wheel i.c. with seat height (incl. tyre and handrim)

RSH (mm) 360 370 380 390 400 410 420 430 440 450 460 470 480 490 500

A
B

CODE	RSH	DESCRIPTION	Ø
2465	A	Six-Star incl. 8 bar high pressure tires and aluminum handrims (pair)	24x1"
752	A	Lightwheel incl. RightRun Light tyres and aluminum handrim black	24"
2473	A	Blacklight aluminum rear wheel, incl. Schwalbe Marathon Plus tyres and aluminum push rims, hub and spokes black	24x1"
2466	A	Cross wheel incl. coarse studded tires and stainless steel handrims (pair) ! Recommendation: CODE 98 side panel	24x1.75"
2461	A	Day-Lite aluminum rear wheel, rim, hub and spokes black. Black aluminum handrim and black MBL Gazelle tires. ! max. user weight 100kg	24x1"
2468	B	Day-Lite aluminum rear wheel, black rim, hub and spokes, black aluminum handrim and black MBL Speedlite tires. ! max. user weight 100kg	25x1"

! Seat height data without seat cushion

Horizontal rear wheel position (center of gravity)

	PASSIV (Pos./mm)			MEDIUM (Pos./mm)			ACTIVE (Pos./mm)**			
	1/45	2/55	3/65	4/75	5/85	6/95	7/105	8/125	9/135	10/145
Position										

! Rear wheel position 8, 9, 10 und 11 not in combination with frame short CODE 351

05 Rear wheel options

CODE	DESCRIPTION
865	Performance Varioblock ! not i.c. with CODE 61 24" and RSH 480mm not i.c. with CODE 62 25" and RSH 500mm not i.c. with CODE 68 26" and RSH 510mm

Please select by ticking the relevant boxes

 Special construction/individual solution o.r. - on request

 Standard version: If no other selection is made, the standard version will be delivered.

Wheel camber

CODE	DESCRIPTION
423	0° wheel camber
447	3°-wheel camber (track adjustable)

06 Handrims

CODE	DESCRIPTION	Ø
493	Stainless steel, polished	24"/25"/26"
494	Aluminum silver anodised ⚠ Not i.c. with Active-Wheel CODE 695	24"
445	Titanium, with 6 brackets ⚠ Only in combination with Aktiv-Wheel CODE 695 or Spinergy-Wheel CODE 2469, 2470, 2471, 2472	24"/25"/26"
168	Optigripp-special handrim for tetraplegics	24"
849	Curve L, aluminum black anodised, ergonomic handrim profile, H 31 mm	24"
850	Curve L Tetra Grip, anti-slip coated, aluminum, suitable for quadriplegics, ergonomic handrim profile, H 31 mm	24"
853	Gekko, aluminum black anodized with replaceable rubber lip, ergonomic hand rim profile, H 31mm	24"

Hand rim options

CODE	DESCRIPTION	
166	Silicon hand rim cover, smooth, black ⚠ Not i.c. with Aluminum handrim CODE 494	24"
692	Handrim distance narrow	24"
693	Handrim distance far	24"

Please select by ticking the relevant boxes


Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

07 Tyres

CODE	DESCRIPTION	Ø		
496	Pneumatic tires 8 bar	24x1"		
897	Schwalbe Marathon Plus Evolution tires, puncture resistant	24x1"	25x1"	26x1"
363	Schwalbe ONE tires, no profile, puncture resistant	24x1"		
395	Maxxis VN Master Alpha Protect tyre black, puncture resistant, 10 bar	24x1"	25x1"	26x1"
474	PU-tyres, puncture safe black	24x1"		

08 Brakes

CODE	DESCRIPTION
305	Pressure brake for user
2595	Light pressure brake made of aluminum, swing away
652	Pressure brake, brake lever cranking near the side panel
681	Brake lever extension, foldable  only in combination with CODE 305 pressure brake




09 Backrest height (BH)

DESCRIPTION	Backrest height in mm				
	(C-620)	(C-626)	(C-631)	(C-632)	
Back strap, adaptable via Velcro straps adjustable +/- 15 mm	250	300	350	400	450

 *Bei CODE 502 nachträgliche Höhenanpassung nicht möglich. Weitere Rückenhöhen auf anfrage

Please select by ticking the relevant boxes Special construction/individual solution o.r. - on request Standard version: If no other selection is made, the standard version will be delivered.

Backrest variants



CODE	DESCRIPTION
2002	Back cover 20 mm wider  only in conjunction with CODE 235 or 292
2003	Back cover 40 mm wider  only in conjunction with CODE 235 or 292
593	Without back cover  recommended when using RIDE back systems

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

10 Backrest

CODE	DESCRIPTION
410	Backrest with push handle short, 50 mm height adjustable
411	Backrest without push handle  incl. carbon positioning handles
502	Backrest with push handle mounted to the frame tube, continuously height adjustable to 150 mm
141	Push handles, swivel-away
2310	Backrest tubes extended 15mm per side
2311	Backrest tubes extended 25mm per side
2312	Backrest tubes retracted 15mm per side
2313	Backrest tubes retracted 25mm per side
2314	Backrest height +45mm (15mm steps) adjustable  only in combination with push handles CODE 410, 411, 141

 Back rest (standard 90° to seat) fold to seat as standard, angle-adjustable and lockable (backrest angle: -5°/ +5°/ + 10°)

Backrest options

CODE	DESCRIPTION
2032	ErgoSeat Pro laterals, small, pair  Recommended at back height 300 - 400 mm

Back strap colours

CODE	DESCRIPTION
235	Textil black
292	Mash, breathable , black

11 Ride System Back

Please specify the CODE from the RIDE order sheet:

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

12 Seat cushions



CODE	DESCRIPTION
560	Seat cushion 30 mm
561	Seat cushion 60 mm
7199	Netti Contour Breathable 3D cover
562	Velcro strip on seat belt

13 Ride System Seat



Please specify the CODE from the RIDE order sheet:

14 Arm supports and arm pads

1 = fixed screwed 2 = swivel up 3 = detachable 4 = lockable 5 = height-adjustable armrest 6 = with wheel cover

CODE	DESCRIPTION	FUNCTIONS
100	Aluminum side panel in frame colour with cold-proof lining, incl. mudguard 35 mm, fixed  incl. mudguard 35mm	1,6
783	Carbon fiber side guard  incl. mudguard 35mm	1,6

Side guard options

CODE	DESCRIPTION
11	Side guard removable  only i.c. with CODE 100 or 783
2903	Sideguard holder aluminum black reinforced  not i. c. with side guard detachable CODE 11

Please select by ticking the relevant boxes

S Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

15 Leg supports and footrests

LLL (mm) 310 320 330 340 350 360 370 380 390 400 410 420 430 440 450 460 470 480

A
B

CODE	LLL (mm)	DESCRIPTION
99	B	One-piece carbon footrest, height, depth and angle-adjustable
311	A	Tubular footrest, aluminium, height-adjustable, matt black
312	B	Footrest one-piece, height / depth and angle adjustable
4312	A	Stable aluminium profile LED footrest incl. headlamp and tail light in frame colour, one-piece, height, depth and angle-adjustable, incl. Blue-tooth module (from seat width 400 mm up) ⚠ from SW 400mm
4313	A	Stable aluminium profile LED footrest incl. headlamp and tail light in frame colour, one-piece, height, depth and angle-adjustable (from SW 400 mm up) ⚠ from SW 400mm
359		Calf belt

Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request

Standard version: If no other selection is made, the standard version will be delivered.

16 Frame design

CODE	DESCRIPTION	COLOUR
2300	Reflective Sticker	white
2301	Reflective Sticker	black
2302	Reflective Sticker	Tricolore
2303	Reflective Sticker	Rainbow

! only i.c. with Sticker Design CODE 2304, 2305

Sticker design

CODE	DESCRIPTION
2304	MEYRA Design
2305	STRIPE Design

! only i.c. with Reflective Sticker CODE 2300, 2301, 2302, 2303

Sticker assembly

CODE	DESCRIPTION
2306	Sticker applied at MEYRA

! If CODE 2306 application at MEYRA's is not selected, the sticker kits will be enclosed as a do-it-yourself version.

17 Frame colours

CODE	DESCRIPTION
4920	Individual wet painting

! Please specify RAL colour or car paint CODE
Wet painting of the side frames
Painting of other assemblies on request


Please select by ticking the relevant boxes

Special construction/individual solution o.r. - on request




Standard version: If no other selection is made, the standard version will be delivered.

18 Options

Hand and spoke guard

CODE	DESCRIPTION
489	Transparent  Not i.c. with Spinergy Wheel CODE 2469, 2470, 2471, 2472



Support castors

CODE	DESCRIPTION
728	Anti-Tip, 1 pair, swivelling (recommended)  Not i.c. with step tube CODE 309
729	1 anti-tip, swivelling, mounted left  not in combination with the display tube CODE 309/4930
730	1 anti-tip, swivelling, mounted right  Not i.c. with entry pipe CODE 309/4931

Pedal tubes

CODE	DESCRIPTION
309	Step tubes (1 pair)  not in combination with support rollers CODE 728, CODE 729 or CODE 730
4930	1 step tube, mounted on the left  not in combination with support rollers CODE 728 or CODE 729
4931	1 step tube, mounted on the right  not in combination with support rollers CODE 728 or CODE 730

Other accessories

CODE	DESCRIPTION
833	Safety belt
970	Crutch holder  only in combination with CODE 309/4390/4391
819	Reflectors  not in v.v.m. CODE 752, 2473, 2461 and 2468
951	Accessory net

USER DATA

First name

Name

Street

ZIP CODE

City

Country

Birthday

Diagnosis 1

Diagnosis 2

Tel.

Mobil

E-mail

Order number

Health insurance fund / cost unit

Specialist trade Contact person/phone.

Supply specialist MEYRA

Approval info from week

ANATOMICAL DATA (IN MM)

1) Seat depth

2) Seat width

3) Chest width

4) Chest depth

5) Elbow height

6) Armpit height

7) Back height


8) Head height

9) Forearm length

10) LLL

Body height

Weight (kg)

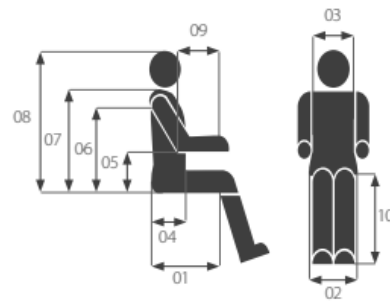

Remarks

I accept the Terms and Conditions of Meyra Distribution GmbH (valid as of January 2023)

<https://www.meyra.com/gtc/>

Date

City

Signature



14 Code 100



10 Code 141



08 Code 305



15 Code 311



15 Code 312




10 Code 410




00 Code 418



00 Code 419



05 Code 423



05 Code 447



10 Code 502



08 Code 652




08 Code 681



18 Code 729



14 Code 783



08 Code 2595



15 Code 4312



18 Code 4930